

▶ Surface mounting wall washer light/IP65




WL130248



Material specifications

Housing:	Extruded aluminum alloy
Glass:	Tempered glass,T=3mm
Lens:	Optical lens, efficiency≥85%
Cable gland:	Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	CREE COB LED
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F 2x0.75mm²L=0.5m(low voltage) H05RN-F 3x0.75mm²L=0.5m(high voltage)


Outer Dimensions Unit:mm

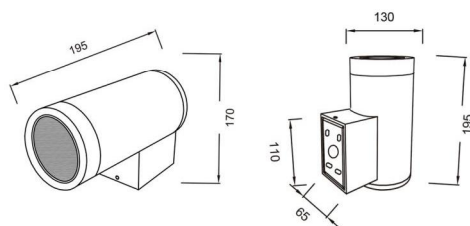

▶ Up/down wall washer light/IP65



WL130358



Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
WL130248	1*24W CREE COB	15°/24°/36°	24W	DC12V/DC24V AC220V/AC240V	05
WL130358	2*17W CREE COB	15°/24°/36°	35W	DC12V/DC24V AC220V/AC240V	05

Outer Dimensions Unit:mm

