


► Ceiling Down Light/IP65



CLS80042

Outer Dimensions _____ Unit:mm



Material specifications

Housing Material:	Casting aluminum
Glass:	Tempered glass, T=3mm
Lens:	Optical lens, efficiency≥85%
Cable gland:	Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	SMD LED
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F 2x0.75mm²L=0.5m(low voltage) H05RN-F 3x0.75mm²L=0.5m(high voltage)

Housing color option _____

Basic	Secondary	
		
Matt black RAL9005	Signal White RAL9003	Grey painting RAL9007



► Surface mounting wall light/IP65



WLS80042

- LED Colour Temperature
- 2700K • 3000K
 - 4000K • 6000K
- Customized Colors

Outer Dimensions _____ Unit:mm

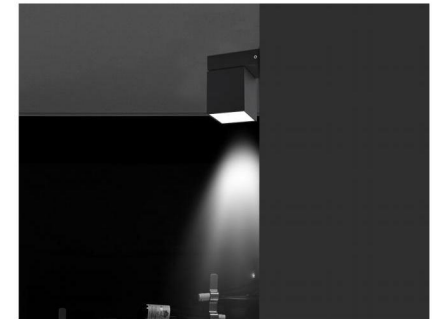

Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
CLS80041	4*1W LED	15°/24°/36°	4W	DC12V/DC24V AC220V/AC240V	06
WLS80041	4*1W LED	15°/24°/36°	4W	DC12V/DC24V AC220V/AC240V	06
CLS80042	4*2W LED	15°/24°/36°	8W	DC12V/DC24V AC220V/AC240V	06
WLS80042	4*2W LED	15°/24°/36°	8W	DC12V/DC24V AC220V/AC240V	06