


## ► LED Garden pillar lamp/Modern Square Shape

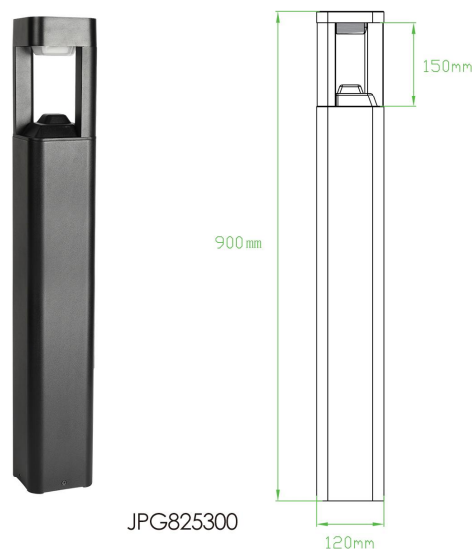


### Material specifications:

|                             |                                                                |
|-----------------------------|----------------------------------------------------------------|
| Material:                   | ADC12# Die-casting powder coated aluminum +PC frosted diffuser |
| Brand LED:                  | OSRAM & CREE & Bridgelux                                       |
| CRI:                        | Ra>85%                                                         |
| IP Grade:                   | IP65                                                           |
| Gasket:                     | Tooling shaped seal                                            |
| Operating temperature:      | -20°C~+40°C                                                    |
| Power cable:                | H05RN-F 3x0.75mm <sup>2</sup> L=0.5m(high voltage)             |
| Size(mm):                   | L120 * W120 * H900mm(H300/H600/H1000)                          |
| Net weight of product (kg): | 3.28kg                                                         |

\*Height can be customized as required

| Item No.  | Light source | Beam angle | Consumption ( watt) | Input Voltage ( V ) |
|-----------|--------------|------------|---------------------|---------------------|
| JPG825300 | OSRAM LED    | 120°       | 10W                 | AC110-265V          |
| JPG825301 | CREE LED     | 120°       | 8W                  | AC100-265V          |

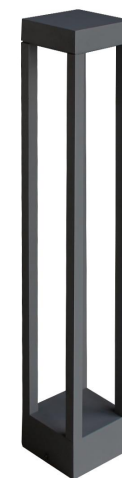

### Material specifications:

|                             |                                                           |
|-----------------------------|-----------------------------------------------------------|
| Material:                   | ADC12# Die-casting powder coated aluminum +Diffuser Glass |
| Brand LED:                  | OSRAM & CREE & Bridgelux                                  |
| CRI:                        | Ra>80%                                                    |
| IP Grade:                   | IP65                                                      |
| Gasket:                     | Tooling shaped seal                                       |
| Operating temperature:      | -20°C~+40°C                                               |
| Power cable:                | H05RN-F 3x0.75mm <sup>2</sup> L=0.5m(high voltage)        |
| Size(mm):                   | L110 * W110 * H900mm(H300/H600/H1000)                     |
| Net weight of product (kg): | 1.70kg                                                    |

\*Height can be customized as required

Outer Dimensions Unit:mm

