
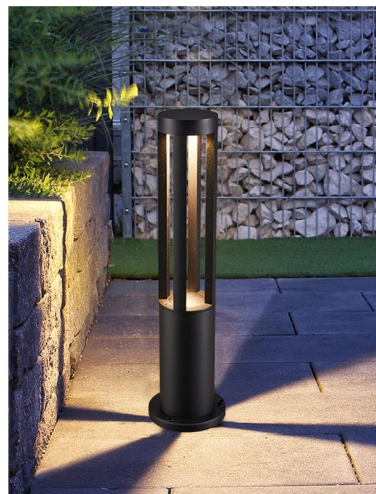


▶ LED Garden pathway light/column shape

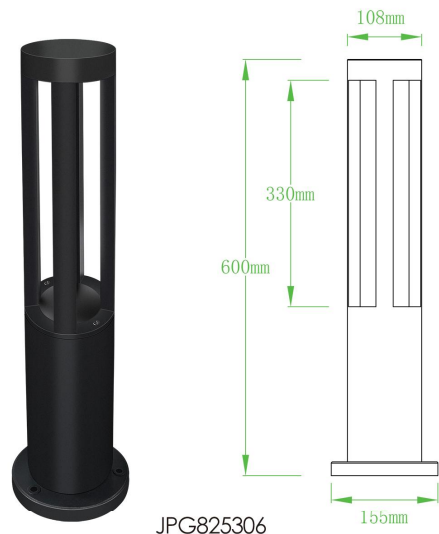

Material specifications:

Material:	ADC12# Die-casting powder coated aluminum+Tempered Diffuser Glass
Brand LED:	OSRAM& CREE& Bridgelux
CRI:	Ra>80%
IP Grade:	IP65
Gasket:	Tooling shaped seal
Operating temperature:	-20°C~+40°C
Power cable:	H05RN-F 2x0.75mm²L=0.5m(low voltage) H05RN-F 3x0.75mm²L=0.5m(high voltage)
Size(mm):	Φ108 * H600mm(H300/H400/H600/H800/H1000)
Net weight of product (kg):	1.64kg

*Height can be customized as required

● LED Colour Temperature	● Customized Colors
• 2700K • 3000K	• Matt black PAL9005
• 4000K • 6000K	

Item No.	Light source	Beam angle	Consumption (watt)	Input Voltage (V)
JPG825306	Bridgelux LED	120°	10W	DC24V AC220V
JPG825301A	Bridgelux LED	120°	10W	DC24V AC220V

▶ LED bollard light/Modern Square Shape



JPG825301A

Material specifications:

Material:	ADC12# Die-casting powder coated aluminum+Tempered Diffuser Glass
Brand LED:	OSRAM& CREE& Bridgelux
CRI:	Ra>80%
IP Grade:	IP65
Gasket:	Tooling shaped seal
Operating temperature:	-20°C~+40°C
Power cable:	H05RN-F 2x0.75mm²L=0.5m(low voltage) H05RN-F 3x0.75mm²L=0.5m(high voltage)
Size(mm):	L110 * W110 * H600mm(H300/H400/H600/H800/H1000)
Net weight of product (kg):	1.35kg

*Height can be customized as required

Outer Dimensions Unit:mm

