


► Advanced customization bollard light



JPG825302

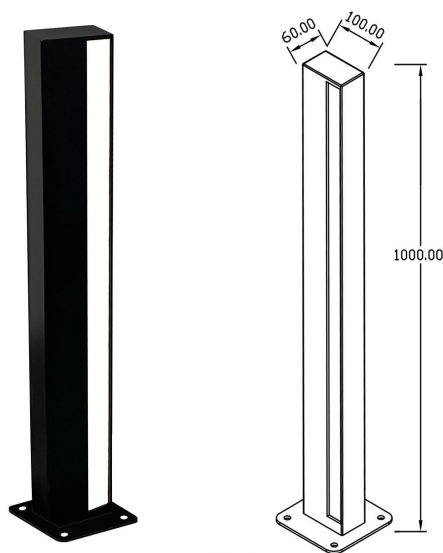

JPG825303

Material specifications:

Material:	Powder-coated stainless steel +Acrylic transparent glass
Brand LED:	OSRAM & CREE & Bridgelux
CRI:	Ra>80%
IP Grade:	IP65
Gasket:	Tooling shaped seal
Operating temperature:	-20°C~+40°C
Power cable:	H05RN-F 3x0.75mm ² L=0.5m(high voltage)
Size(mm):	L130 * W130 * H460mm
Net weight of product (kg):	6.20kg

*Height can be customized as required


Material specifications:

Material:	Powder-coated stainless steel +PC frosted diffuser
Brand LED:	OSRAM & CREE & Bridgelux
CRI:	Ra>80%
IP Grade:	IP65
Gasket:	Tooling shaped seal
Operating temperature:	-20°C~+40°C
Power cable:	H05RN-F 3x0.75mm ² L=0.5m(high voltage)
Size(mm):	L100 * W60 * H1000mm(H300/H600/H800)
Net weight of product (kg):	7.33kg

*Height can be customized as required

● LED Colour Temperature	● Customized Colors
• 2700K • 3000K	• Matt black PA19005
• 4000K • 6000K	

Outer Dimensions ————— Unit:mm

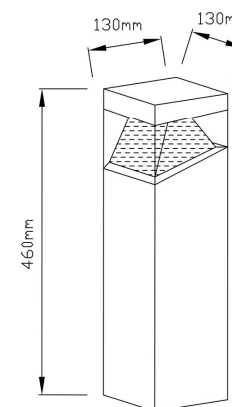

Item No.	Light source	Beam angle	Consumption (watt)	Input Voltage (V)
JPG825302	CREE LED	120°	8W	AC100-265V
JPG825303	Bridgelux LED	120°	16.6W	AC220V