

Power LED inground light/COB LED up light with stainless steel face cover



C8253X

Material specifications

Housing:	ADC12#casting aluminum with outdoor dark grey powder coating T=60-80um adhesion of ISO class 1/ASTM class 4B
Front cover:	304# or 316#StainlessSteel
Lens:	Optical lens, efficiency≥85%
Glass:	Tempered step glass T=7mm
Glass pressure capacity:	Full area =1900kgs
Gasket:	Molding shaped silicone seal
Operating temperature:	-20°C ~ 40°C
Power cable:	H05RN-F 2×0.75mm² L=0.5m(low voltage) H05RN-F 3×0.75mm² L=0.5m(for Single color/high voltage) H05RN-F 4×0.75mm² L=0.5m(for RGB)
Mounting sleeve:	ABS



Housing color option

Dark grey RAL7012	Silver painting RAL9006
Matt black RAL9005	



Back view

Asymmetrical lens:

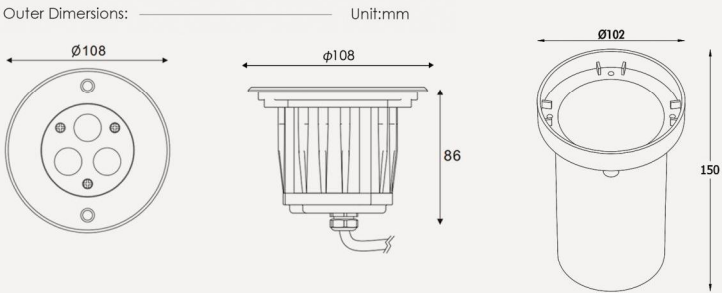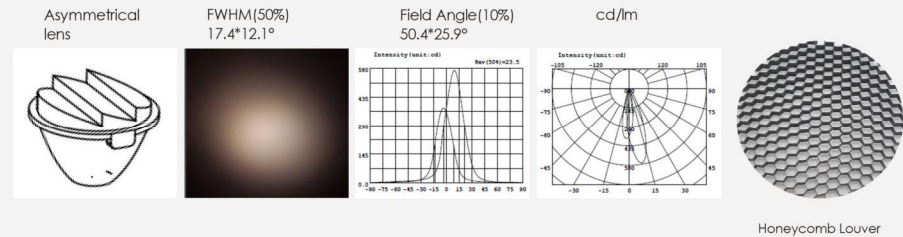

*Note:

1. Item No. with "H" stands for "input voltage AC100-240V"
2. Item No. with "AS" stands for "Asymmetrical lens"
3. Any special customization, to be confirmed with us

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
C82531(H/AS)	3x1W LED	8°/15°/25°/30°/45°/60°	3.2	DC12V/DC24V/AC100-240V	08
C82532(H/AS)	3x2W LED	8°/15°/25°/30°/45°/60°	6.2	DC12V/DC24V/AC100-240V	08
C82534	3x2W RGB LED	8°/15°/25°/30°/45°/60°	5.8	DC12V/DC24V	08
C82536	3x3W RGB3in1 LED	25°/30°/45°/60°	9.2	DC12V/DC24V	08
C825068COB(H)	1x6W CREE COB	15°/24°/38°/60°	6.3	DC12V/DC24V/AC100-240V	08