

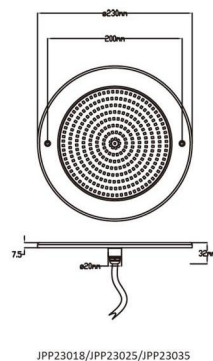



PAR56-Fully Plastic /PC+ABS

Ultra-thin 7.5mm(DC series)



Connection Diagram

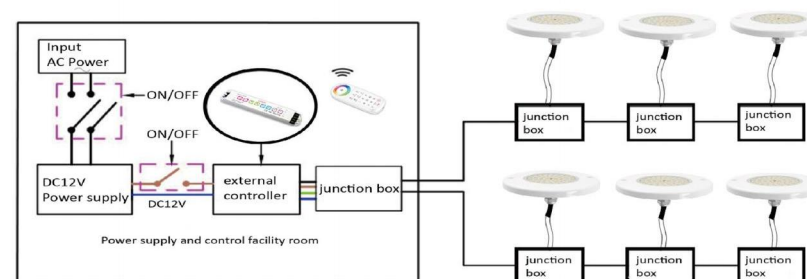

Item No.	LED Qty (pcs)	Power	Input Voltage	Emitting Color	Beam Angle	Material
JPP12006	SMD 2835 63pcs	6W	DC12V	Warm White Cool White Red Green Blue RGB RGBW	120°	PC
JPP16010	SMD 2835 108pcs	10W				
JPP23018	SMD 2835 252pcs	18W				
JPP23025	SMD 2835 324pcs	25W				
JPP23035	SMD 2835 432pcs	35W				

Material specifications

Housing	PC
LED	High bright SMD LED
CRI	Ra>80
IP Grade	IP68
Working Environment	-20℃~+40℃
Power cable	2 meters H05RNF 2 wires (single color)/ 4 wires (RGB)/5 wires (RGBW)
Control mode	• Switch control • Remote control(RF,IR) • APP,DALI,0-10V ...

