IP67 OUTDOOR RATED | RoHS Compliant | CE

95 Beam Angle Adjustable In-ground Light

with stainless steel face cover




82712D



82738

Outer Dimersions: ——————————— Unit : mm

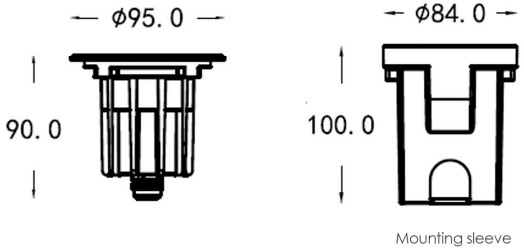

Mounting sleeve

Material specifications:

Characteristic:	Surface Adjustable Beam Angle
Surface material:	SUS316L Stainless steel
Lamp body:	ADC12# Die-casting aluminum
Lens:	Optical lens, efficiency≥85%
Glass:	Transparent tempered glass.T=7mm
Cable gland:	M12 nickel coated coopper
Gasket:	Molding shaped silicone seal
Operating temperature:	-20°C～40°C
Power cable:	HO5RN-F2*0.75mm² L=0.5m(low voltage) H05RN-F3*0.75mm² L=0.5m(for single color/high voltage) HO5RN-F5*0.75mm² L=0.5m(for RGBW)
Mounting sleeve:	ABS Black plastic

IP67 OUTDOOR RATED | RoHS Compliant | CE

95 LED In-ground Light/LED step light

with stainless steel face cover



82742/827149

Optional part: ——————————

a.Honeycomb Louver b.Spread Lens c.Diffusion Lens



Item No.	Light source	Lens beam angle (°)	Input Voltage (V)	Ik rate	Adjustable (Y/N)
82712D	1x3W LED	12°/15°/25°/40°/60°/Asy.	DC12V/24V/ AC100-240V	IK08	Y
82738	3W COB	15°/25°/36°	DC12V/24V/ AC100-240V	IK08	N
82742	4x2W	12°/15°/25°/40°/60°/Asy.	DC24V/ AC100-240V	IK08	N
827149	4x1W RGBW4in1	12°/15°/25°/40°/60°/Asy.	DC24V	IK08	N