
Square Underground wall washer light
-Stainless steel trim-






82842P(H)

Outer Dimensions: Unit:mm






mounting sleeve



side view


Material specifications

Housing	ADC12#Die-casting powder coated aluminum, T=60-80um Adhesion of ISOclass 1/ASTMclass 4B
Front cover:	Stainless steel 316L#or 304#
Glass:	Tempered Step glass T = 8mm
Lens:	High quality optical lens, efficiency≥85%
Gasket:	Molding shaped silicone seal
Glasspressure capacity:	Fullarea=2500kgs
Operating temperature:	-20°C~40°C
Power cable:	HO5RN-F 2×0.75mm² L=0.5m(low voltage) HO5RN-F 3x0.75mm² L=0.5m(for Single color/high voltage)
Mounting sleeve:	Poder coatediron T=I.5mm



112°x62°

IP67 OUTDOOR RATED | RoHS Compliant | CE

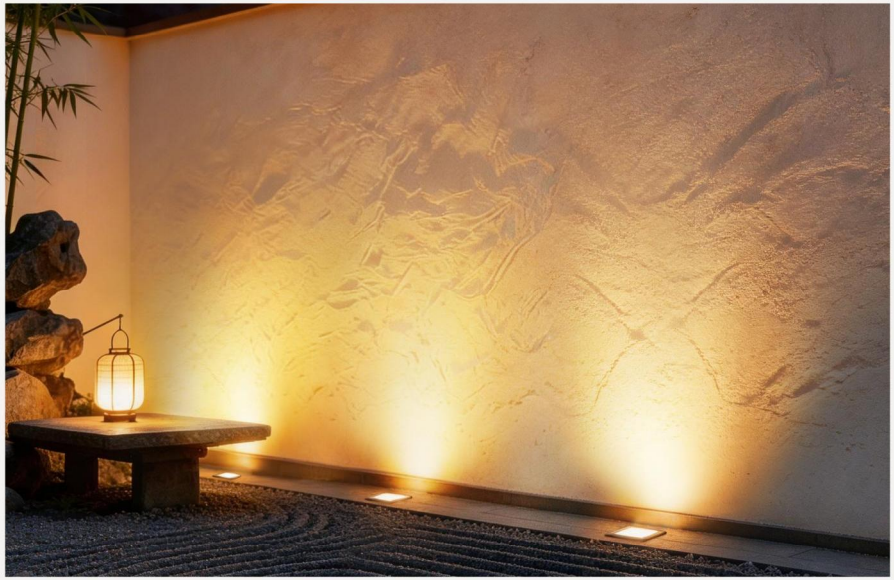

Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
82842P(H)	4x2W LED	112°x62°	8.5	DC24V/AC100-240V	08

Distribution Curve Flux

Lens beam angle:112°x62° / Efficiency:78%

