
Ground Recessed Wall Washer-
Polarization Underground light






827138P

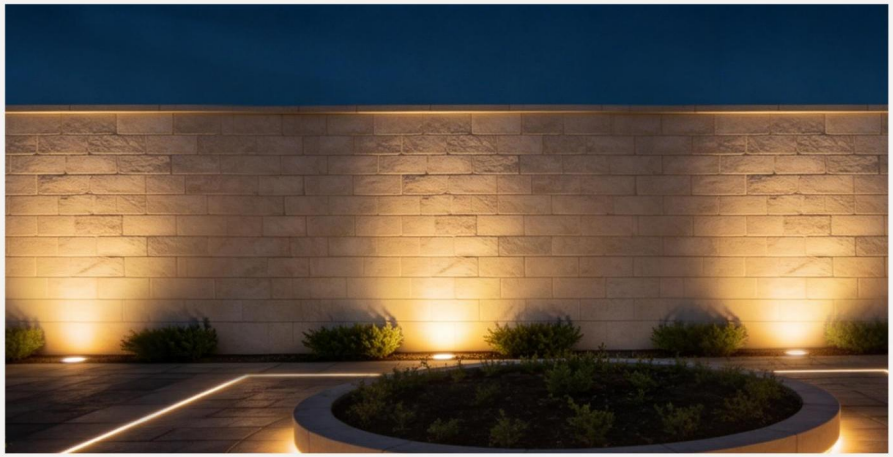

Outer Dimensions: ——————————————— Unit:mm

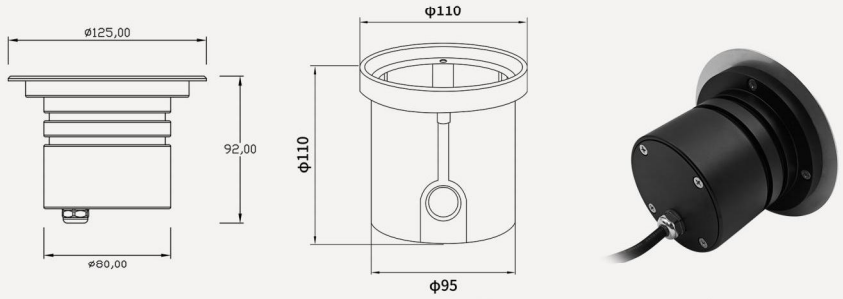

mounting sleeve


side view

Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
827138P	1x10W LED	P30°	10.0	DC24V/AC100-240V	08

Distribution Curve Flux


CREE-1507 / Lens beam angle:P30°





Material specifications

Housing	Pure aluminum 6063# housing, outdoor powder painted or anti UV anodized
Front cover:	Stainless steel 316L#or 304#
Glass:	Step tempered glass T = 8mm
Lens:	High quality optical lens, efficiency≥85%
Cable gland:	IP-68 M12 nickel coated copper
Gasket:	Molding shaped silicone seal
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F 2x0.75mm² L=0.5m(low voltage) H05RN-F 3x0.75mm² L=0.5m(for single color/high voltage)
Mounting sleeve:	ABS



Luminous effect diagram