Strong load-bearing capacity

Drive-over inground light/stainless steel face cover

1E826068/1E826108/1E826158



2E826068/2E826108/2E826158



4E826068/4E826108/4E826158

Plastic mounting sleeve

Outer Dimersions: Unit:mm



For 1E826XX8/2E826XX8



For 4E826XX8



plastic mounting sleeve

IP67 OUTDOOR RATED | RoHS Compliant | CE

Material specifications

Housing:	Outdoor dark grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover:	Hard chrome plate 304# or 316#Stainless Steel
Lens:	Optical lens, efficiency≥85%
Glass:	PMMA diffuser
Glass pressure capacity:	>2000kgs
Gasket:	Molding shaped silicone seal
Operating temperature:	-20˚C ~ 40˚C
Power cable:	H05RN-F 2×0.75mm² L=0.5m(low voltage) H05RN-F 3×0.75mm² L=0.5m(for Single color/high voltage) H05RN-F 4×0.75mm² L=0.5m(for RGB)
Mounting sleeve:	ABS

bottom view

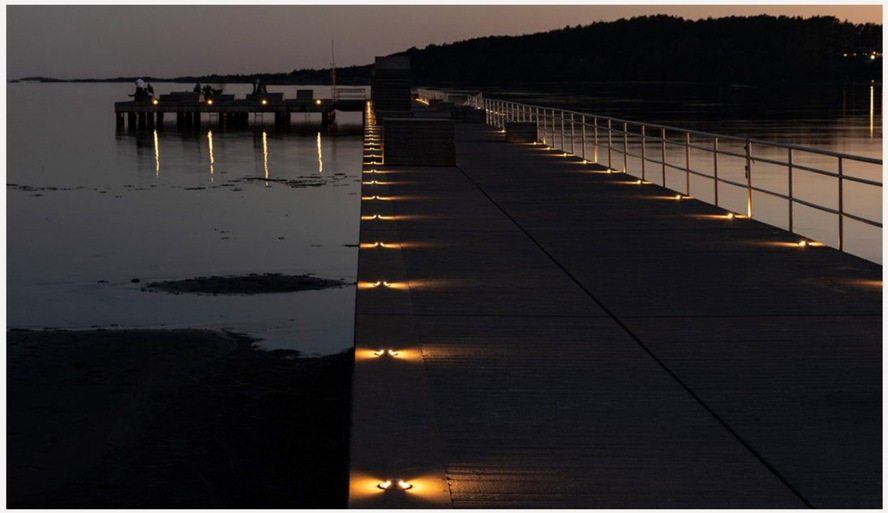

***Note:**

1. Item No. with "H" stands for "input voltage AC100-240V"
2. Any special customization, to be confirmed with us

Item No.	Light source	Consumption (watt)	Input Voltage(V)	Ik rate
1E826068(H)/2E826068(H)/ 4E826068(H)	1x8WCOB LED	8.1	DC12V DC24V AC100-240V	10
1E826307(H)/2E826307(H)/ 4E826307(H)	SMD2835*30pcs	10	DC24V/100-240V	10
1E826158(H)/2E826158(H)/ 4E826158(H)	1x15W COB LED	15.2	DC12V DC24V AC100-240V	10