IP68 OUTDOOR RATED | RoHS Compliant | CE

Stainless steel wall recessed LED pool light

94761
94762
94766

94791
94792
94796

LED swimming pool light

complete stainless steel SUS304 or 316# housing&Accessories

Asymmetrical lens

94761AS
94762AS
94766AS

94749
94747

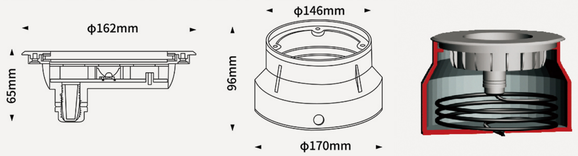

Mounting sleeve

- LED Colour Temperature
  - 2700K • 3000K
  - 4000K • 6000K
- optics
  - 8°/15/25/30/45/60°

Material specifications

Front cover&Housing:	Molding shaped 304# or 316L# stainless steel
Glass:	Tempered glass T=8mm
Lens:	Optical lens, efficiency ≥85%
Cable gland:	IP-68 PG-11 copper and nickel coated
MCPCB:	Excellent heat conductivity aluminum, coefficient of heat conductivity≥2.0w/mk;
Driver:	Constant current output Single color LED=1-circuit output RGB LED=3-circuit output RGB 3inl LED=3-circuit output
Application environment:	Temperature of water between -20°C ~ 40°C less than 1.0 meter depth.
Power cable:	H05RN-F 2×0.75mm² L=2m(for Single color) H05RN-F 4×0.75mm² L=2m(for RGB)
Mounting sleeve:	Plastic

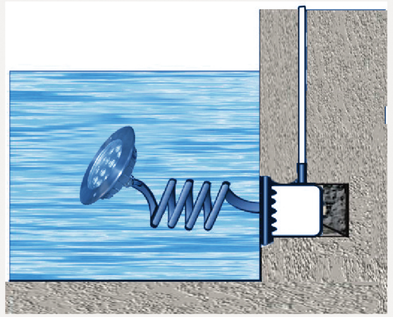

Water must be allowed to go inside and outside sleeve freely without leaking to the other side.

*Warning:
Must be installed under the water to prevent the lights from being burnt off because of the over-heating.

*If the lens is Asymmetrical, the item number with"AS"

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
94761(AS)	6x1W	15°/30°/45°	6.5W	DC24V	08
94762(AS)	6x2W	15°/30°/45°	14W	DC24V	08
94766(AS)	6x3W RGB3in1	15°/30°/45°	17.8W	DC24V	08
94791	9x1W	15°/25°/45°/60°	9.6W	DC12V/DC24V	08
94792	9x 2W	15°/25°/45°/60°	19.8W	DC12V/DC24V	08
94793	9x1W RGB	15°/25°/45°/60°	9.2W	DC12V/DC24V	08
94794	9x2W RGB	15°/25°/45°/60°	17.5W	DC12V/DC24V	08
94796	9x3W RGB3in1	25°/45°/60°	25.2W	DC12V/DC24V	08
94749(AS)	4x5W RGBW4in1 (W=3000K 4000K 6000K)	15°/25°/30°/45°/60°	20.4W	DC24V	08
94747(AS)	4x5W LED	15°/25°/30°/45°/60°	24.8W	DC24V	08