

Split type Pool light /316L+ABS Ultra-thin 7.5mm(DC series)



JP110-6W-DC



JP160-10W-DC




JP230-18W-DC
JP230-25W-DC
JP230-35W-DC

JP280-25W-DC
JP280-35W-DC
JP280-42W-DC

Material specifications


Housing	PC
Front Cover	Stainless steel 316L
LED	High bright SMD LED
CRI	Ra>80
IP Grade	IP68
Working Environment	-20 C ~ +40 C
Power cable	2 meters H05RN-F 2 wires (single color)/ 4 wires (RGB)/5 wires (RGBW)
Control mode	<ul style="list-style-type: none"> • Switch control • Remote control(RF,IR) • APP,DALI,0-10V ...

Connection Diagram

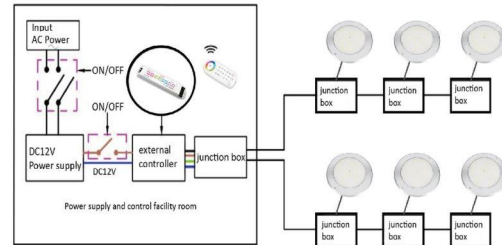


Outer Dimensions


Unit:mm

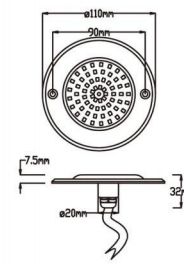


JP110-*DC

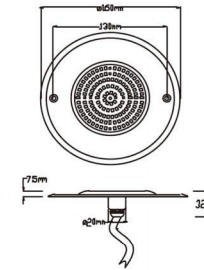

JP160-*DC

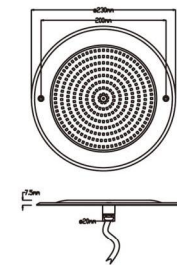

JP230-*DC

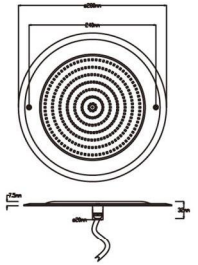

JP280-*DC


Item No.	LED Qty (pcs)	Power	Input Voltage	Emitting Color	Beam Angle	Material
JP110-6W-DC	SMD 2835 63pcs	6W	DC12V	Warm White Cool White Red Green Blue RGB RGBW	120°	316SS+PC
JP160-10W-DC	SMD 2835 108pcs	10W				
JP230-18W-DC	SMD 2835 252pcs	18W				
JP230-25W-DC	SMD 2835 324pcs	25W				
JP230-35W-DC	SMD 2835 432pcs	35W				
JP280-25W-DC	SMD 2835 324pcs	25W				
JP280-35W-DC	SMD 2835 432pcs	35W				
JP280-42W-DC	SMD 2835 540pcs	42W				



side view



back view



Guidance for installation