IP67 Ultra-thin step light & Pathway lights

Pure aluminum6063#

1EC84337

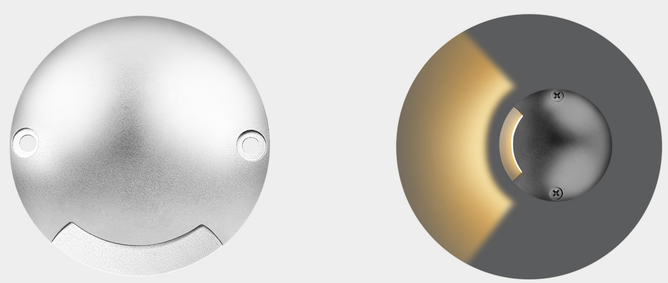

2EC84367

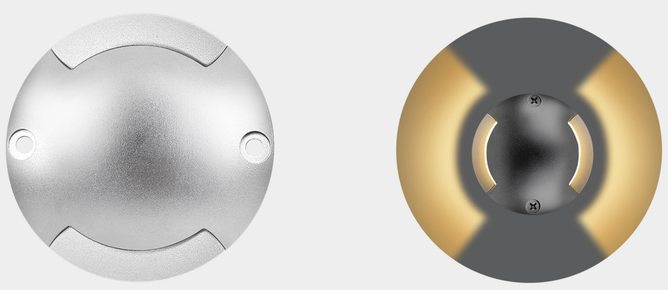

Material specifications:

Housing&face cover:	Pure aluminum 6063# , outdoorpowder painted or anti-UV anodized
Diffuser:	PMMA T=5mm
Gasket:	Molding shaped silicone seal
Operating temperature:	-20°C～40°C
Power cable:	H05RN-F 2x0.75mm²L=0.5m(low voltage)

back view

IP67 OUTDOOR RATED | RoHS Compliant | CE

Outer Dimersions: ——————————————Unit : mm

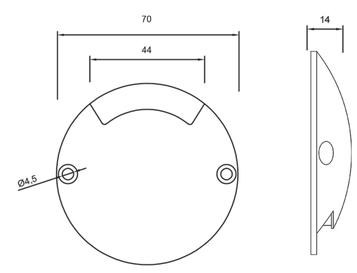

1EC84337

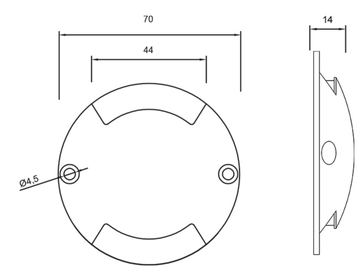

2EC84367

Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
1EC84337	3xSMD2835	One window	1.5W	DC12V/DC24V	08
2EC84367	6xSMD2835	Two windows	3W	DC12V/DC24V	08