

▶ Surface mounting wall washer light/IP65



WL100188



▶ Up/down wall washer light/IP65



WL100248




Material specifications

Housing:	Extruded aluminum alloy
Glass:	Tempered glass.T=3mm
Lens:	Optical lens, efficiency≥85%
Cable gland:	Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	CREE COB LED
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F 2x0.75mm²L=0.5m(low voltage) H05RN-F 3x0.75mm²L=0.5m(high voltage)

Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
WL100188	1*18W CREE COB	15°/38°/60°	18W	DC12V/DC24V AC220V/AC240V	05
WL100248	2*12W CREE COB	15°/38°/60°	24W	DC12V/DC24V AC220V/AC240V	05

Outer Dimensions Unit:mm

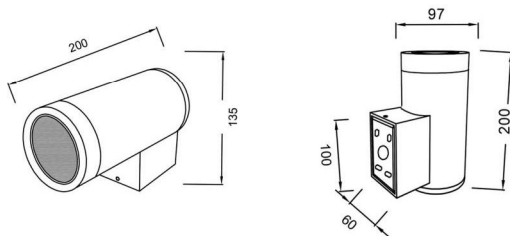

Outer Dimensions Unit:mm

