


### ▶ Wall mounted wall washer/IP65




WL80108

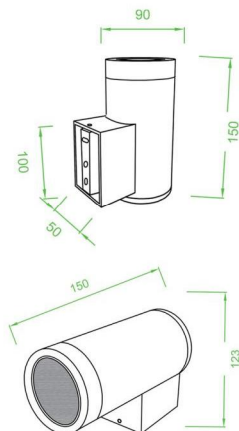

### ▶ Up/Down wall washer/IP65



WL80168

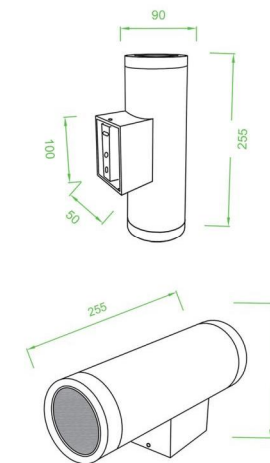


#### Material specifications

Housing:	Extruded aluminum alloy
Glass:	Tempered glass, T=3mm
Lens:	Optical lens, efficiency≥85%
Cable gland:	Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	CREE COB LED
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F 2x0.75mm <sup>2</sup> L=0.5m(low voltage) H05RN-F 3x0.75mm <sup>2</sup> L=0.5m(high voltage)



#### Housing color option

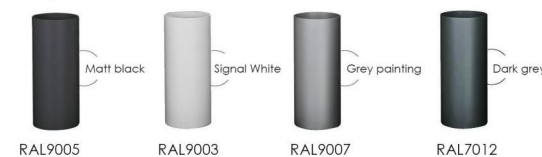

Item No.	Light source	Lens beam angle (°)	Consumption ( watt)	Input Voltage ( V )	Ik: rate
WL80108	1*10W CREE COB	15°/24°/30°/60°	10W	DC12V/DC24V AC220V/AC240V	05
WL80168	2*8W CREE COB	15°/24°/30°/60°	16W	DC12V/DC24V AC220V/AC240V	05

