IP65 OUTDOOR RATED | RoHS Compliant | CE

Recessed LED Wall Light/LED Step Light

817187/817068

- LED Colour Temperature
  - 2700K • 3000K
  - 4000K • 6000K
- Custmized Colors

Housing color option

Grey painting RAL9007	Silver painting RAL9006
Matt black RAL9005	Custmized Colors

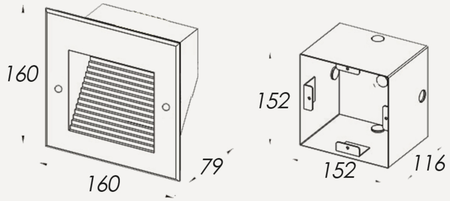

Mounting sleeve

Material specifications

Housing	ADC12#Die-casting outdoor powder coated aluminum
Front cover	ADC12#Die-casting outdoor powder coated aluminum
Glass	Tempered glass. T=3mm
Cable gland:	IP67 Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	SMD LED or Customized LED
PCB:	Excellent heat conductivity aluminum, coefficient of Heat Conductivity≥2.0w/mk
Driver:	Constant current output
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F2*0.75mm²L=0.3m(low voltage) H05RN-F3*0.75mm²L=0.3m(high voltage)

IP65 OUTDOOR RATED | RoHS Compliant | CE

818067/818058

- LED Colour Temperature
  - 2700K • 3000K
  - 4000K • 6000K
- Custmized Colors

Housing color option

Grey painting RAL9007	Silver painting RAL9006
Matt black RAL9005	Custmized Colors

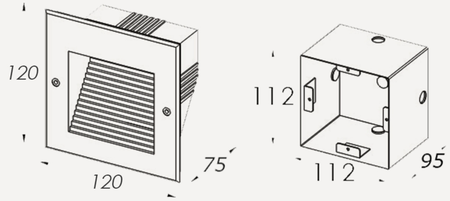

Mounting sleeve

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
817187	OSRAM SMD2835*18	120°	2.5	AC100-240V	10
817068	1*6W SMD LED	120°	6.4	DC24V/AC100-240V	10
818067	OSRAM SMD2835*6	120°	1.8	12VDC/24VDC	10
818058	1*5W SMD LED	120°	5.5	DC24V/AC100-240V	10