IP65 OUTDOOR RATED | RoHS Compliant | CE

Recessed LED Wall Light &Stair Light

819157





plastic sleeve

Material specifications

Housing	ADC12#Die-casting outdoor powder coated aluminum
Front cover	ADC12#Die-casting outdoor powder coated aluminum
Glass	Tempered glass. T=3mm
Cable gland:	IP67 Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	SMD LED or Customized LED
PCB:	Excellent heat conductivity aluminum, coefficient of Heat Conductivity≥2.0w/mk
Driver:	Constant current output
Operating temperature:	-20°C~40°C
Power cable:	H05RN-F 2*0.75mm²L=0.3m(low voltage) H05RN-F 3*0.75mm²L=0.3m(high voltage)

IP65 OUTDOOR RATED | RoHS Compliant | CE

819187

plastic sleeve

Outer Dimensions

Unit:mm

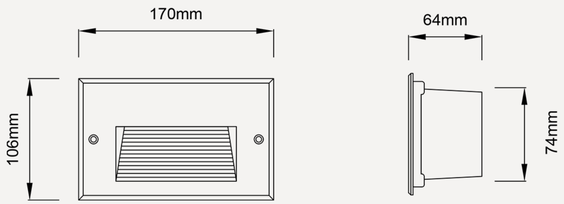

Item No.	Light source	Lens beam angle(°)	Consumption (watt)	Input Voltage(V)	Ik rate
819187	SMD3528*18	120°	2.5	AC100-240V	10
819088	6*1W OSRAM	120°	8.2	DC24V/AC100-240V	10
819157	SMD3528*15	120°	2.2	AC100-240V	10
819068	6*1W OSRAM	120°	6.2	DC24V/AC100-240V	10