COB LED Garden Spot Light/COB LED spike light

B83506COB

B83306COB

RGBW4in1

B835109

Outer Dimensions — Unit:mm







Material specifications

Housing	Aluminum anodized finshing & powder painting
Glass:	Tempered glass. T=3mm
Lens:	Optical lens, efficiency≥85%
Cable gland:	Copper and nickel coated
Gasket:	Tooling shaped seal
LED:	CREE COB LED
Driver:	Constant current outputut
Spike:	PVC(grey or black)
Mounting base:	Aluminum anodized finshing or powder painting.
Power cable:	H05RN-F 2x0.75mm2 L=1m(low voltage) H05RN-F 3x0.75mm2 L=1m(high voltage) HO5RN-F5x0.75mm2 L=1m(RGBW)

B83506COB+antiglare hood

IP65 OUTDOOR RATED | RoHS Compliant | CE

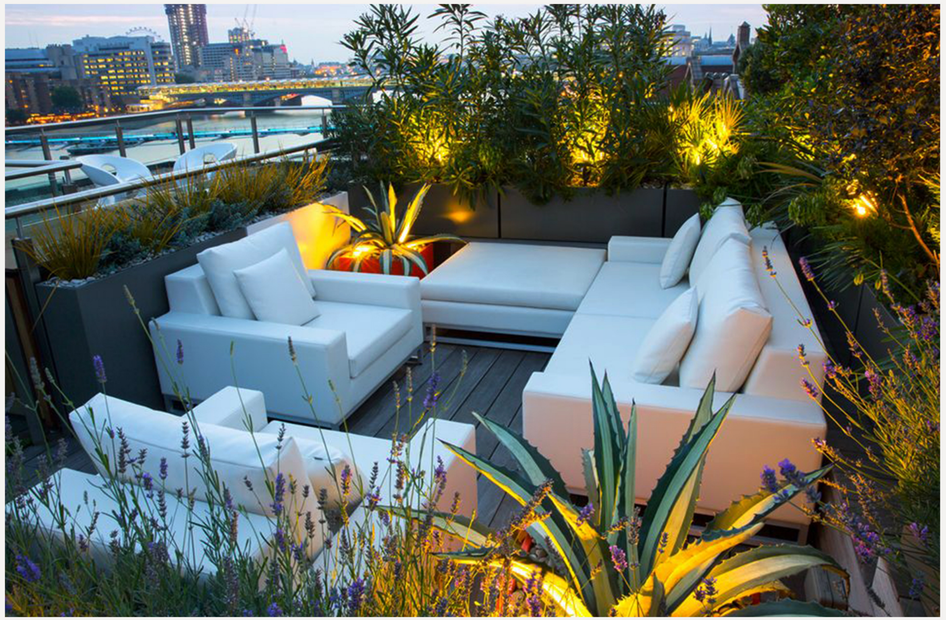

6W COB, 36° Photometric Data of Luminaire:

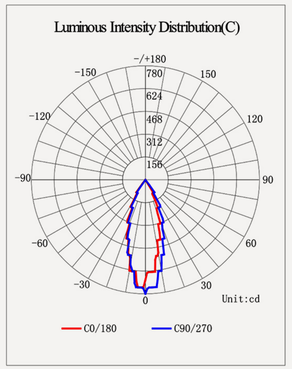

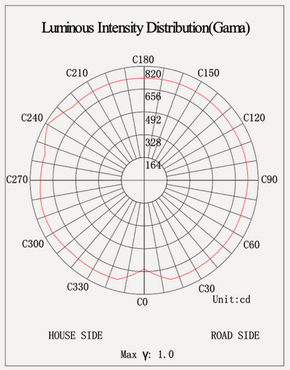

Item No.	Light source	Lens bean angle (°)	Consumption (watt)	Input Voltage(V)	Ik rate
B83306COB B83506COB	1x6W CREE	15°/25°/38°/60°	5.3	DC12V/DC24V	04
B83306COB B83506COB	1x6W CREE	15°/25°/38°/60°	6.5	AC120V/AC240V	04
B833109 B835109	1x10W RGBW4in1 (W=3000/4000/6000K)	24°/36°/60°/10x30°	10.2	DC12V/DC24V	04