

COB LED inground light

with stainless steel face cover




C829068

- LED Colour Temperature
- 2700K • 3000K
 - 4000K • 6000K
- Customized Colors

Housing color option

- Dark grey RAL7012
- Silver painting PAL 9006
- Matt black PAL9005

Outer Dimensions Unit:mm

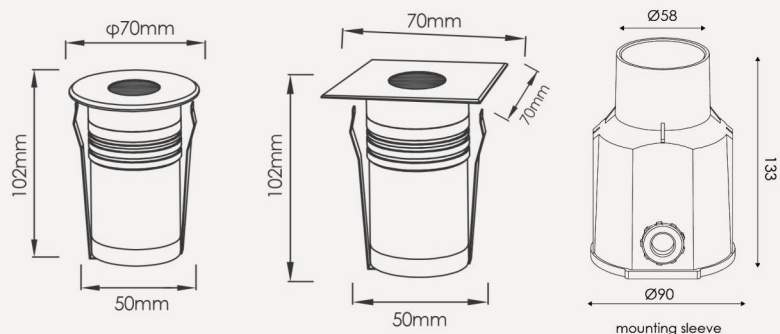

Square underground light

with stainless steel square face cover



CS829068

Material specifications

Housing:	Outdoor dark grey powder coated aluminum T=60-80um Adhesion of ISO class 1/ASTM class 4B
Front cover:	304# or 316# Stainless Steel
Lens:	Optical lens, efficiency 265%
Glass:	Tempered step glass T=7mm
Glass pressure capacity:	Full area =760kgs
Gasket:	Molding shaped silicone seal
Operating temperature:	-20°C ~ 40°C
Power cable:	H05RN-F 2*0.75mm² L=0.5m (low voltage) H05RN-F 3*0.75mm² L=0.5m (for single color/high voltage)
Mounting sleeve:	ABS



Item No.	Light source	Lens beam angle (°)	Consumption (watt)	Input Voltage (V)	Ik rate
C829068(H)	1*6W COB LED	15°/25°/38°/60°	6.2W	DC12V/DC24V AC100V-AC240V	08
CS829068(H)	1*6W COB LED	15°/25°/38°/60°	6.2W	DC12V/DC24V AC100V-AC240V	08